




Exe Holding - PANEL UVC

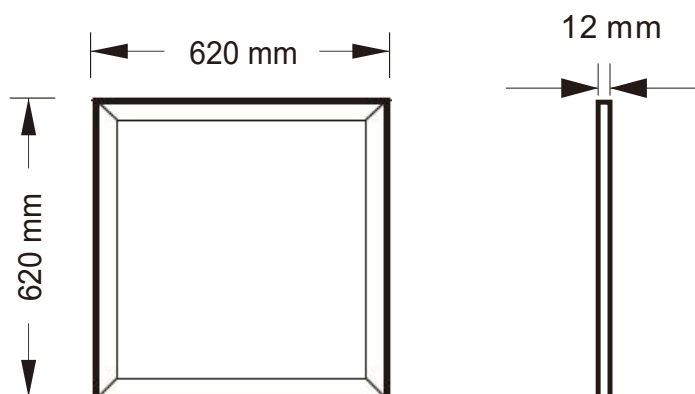

DATE ELECTRICE

Voltage [V]	220 - 240
Frecventa [Hz]	50
Putere [W]	40W+20W(UVC+UVA)
Sursa	LED

DATE FOTOMETRICE

Flux luminos [lm]	100 lm/W
Optica [°]	120
CRI [RA]	80
CCT[K]	2700- 6500

DIMENSIUNI

Lungime [mm]	620
Latime[mm]	620
Inaltime [mm]	12

DATE TEHNICE

Montaj	INCASTRAT
Finisaj	ALB
Protectie [IP]	44

- design ultra-subtire 12mm;
- rama realizata din aluminiu cu o conductivitate termica ridicata, care ajuta la disiparea caldurii si la reducerea degradarii a lampii in timp;
- are avantajul de a indeplini doua functii: sterilizare si iluminare;
- switch control dublu:
 - A - iluminare 2700-6500K
 - B - sterilizare UVC(270-280nm)+UVA(390-400nm)
- potrivit pentru spitale, clean rooms, fabrici produse farmaceutice, fabrici produse alimentare, laboratoare.

